



SUBMITTAL INFORMATION

"U" Branch Piece - (U48-xx-xx-G-NL style)



GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY TWO MALE IRON PIPE THREAD OUTLETS

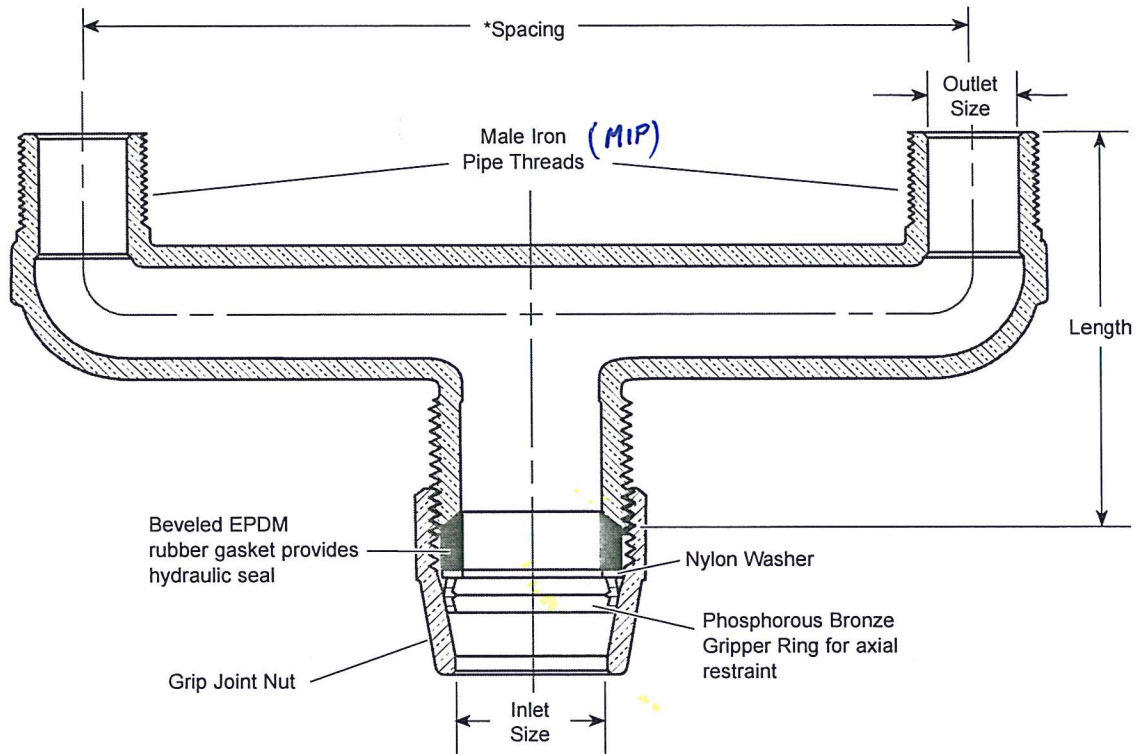

DESCRIPTION		LENGTH	SPACING	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
GRIP JOINT INLET	MIP OUTLET					
3/4"	Two - 3/4"	3-1/16"	6-1/2"	1.8	▼ U48-33-65-G-NL	
3/4"	Two - 3/4"	3-1/16"	7-1/2"	2.1	*▼ U48-33-G-NL	
1"	Two - 3/4"	3-3/16"	6-1/2"	1.8	▼ U48-43-65-G-NL	
1"	Two - 3/4"	3-3/16"	7-1/2"	2.7	*▼ U48-43-G-NL	
1"	Two - 3/4"	3-3/16"	12-1/2"	3.0	U48-43-125-G-NL	
1"	Two - 3/4"	3-3/16"	14"	3.1	U48-43-14-G-NL	
1-1/2"	Two - 3/4"	3-3/8"	7-1/2"	3.2	* U48-63-G-NL	

* 7-1/2" spacing is standard and will be provided unless otherwise specified.

▼ UL Classified to ANSI/NSF Standard 61 and Annex G (372).

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- 7-1/2" spacing will be provided unless otherwise specified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

03/20/13

Submitted By: